

TEST & MEASUREMENT ACCESSORIES



TEST PROBES & CLIPS

Compact probe and clip range with PA insulation and brass/stainless-steel contacts. Standard and CAT-rated safety versions are available.

Model	Construction / Connection	Rating
20.131 / 20.132	Mini test clip; pin connection; PA; brass; gold plated.	30 VAC-60 VDC / 2 A
20.135	Mini test clip; solder connection; PA; brass body.	30 VAC-60 VDC / 10 A
20.165	Safety probe; 4 mm socket; stainless-steel needle.	CAT II 600 V / 1 A
20.172 / 20.173	Safety clip; 4 mm socket; brass/stainless steel.	CAT II 1000 V / 10 A
20.211 / 20.212	Safety probe; 4 mm socket; PA; brass body.	CAT II 1000 V / 20 A



BANANA PLUGS

4 mm plug family with brass contacts, PA/PVC/ABS insulation, nickel/gold plating and solder or screw termination.

Model Group	Construction / Termination	Rating
25.436	PVC; brass; BeCu spring; gold plated; solder.	30 VAC-60 VDC / 24 A
25.452 / 25.454 / 25.455	PA; brass; BeCu spring; nickel plated; solder/screw.	30 VAC-60 VDC / 32 A
25.440 / 25.450 / 25.451 / 25.500	PA; brass; BeCu spring; nickel plated.	CAT II 600 V / 32 A
25.505	PA; brass; nickel plated; solder.	CAT II 600 V / 19 A
10.011 / 10.012	ABS; brass/steel; gold plated; screw.	30 VAC / 32 A
25.503 / 25.504	PA; brass; BeCu spring; screw; straight/right-angle.	CAT II 600 V / 32 A

TEST & MEASUREMENT ACCESSORIES



PANEL SOCKETS

Panel-mount sockets for test benches and instruments, using ABS or PA insulation with brass contact bodies and nickel-plated surfaces.

Model	Construction	Rating
24.246	ABS; brass body; nickel-plated panel mount.	30 VAC-60 VDC / 11 A
24.249	PA; brass body; nickel-plated panel mount.	30 VAC-60 VDC / 24 A
24.242	ABS; brass body; nickel-plated panel mount.	30 VAC-60 VDC / 24 A
24.260	PA; brass body; safety panel socket.	CAT II 1000 V / 32 A




BINDING POSTS

Binding posts with ABS insulation, brass conductive bodies and nickel-plated surfaces in multiple mechanical styles.

Model	Construction	Rating
24.821 / 24.822	ABS; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A
24.824 / 24.825	ABS; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A
24.826	ABS; brass body; nickel-plated surface.	30 VAC-60 VDC / 19 A
24.827 / 24.828 / 24.829	ABS; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A

TEST & MEASUREMENT ACCESSORIES

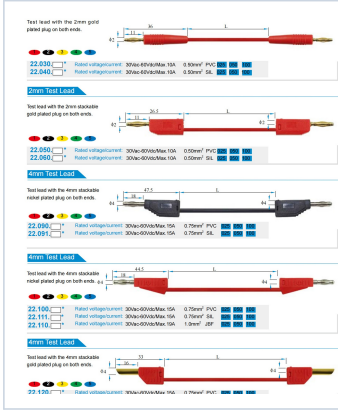

TEST LEADS & SAFETY TEST LEADS

2 mm and 4 mm PVC/silicone test leads. Standard and safety versions cover low-voltage bench work through CAT II 1000 V applications.

Model Group	Connection / Cable	Rating
22.030-22.060	2 mm gold-plated plugs; 0.50 mm ² PVC/silicone.	30 VAC-60 VDC / 10 A
22.090-22.121	4 mm stackable nickel/gold plugs; 0.75-1.0 mm ² .	30 VAC-60 VDC / 15-19 A
22.162-22.201	4 mm injected/standard plugs; 0.75-2.5 mm ² .	30 VAC-60 VDC / 15-32 A
22.210 / 22.241	Insulated 4 mm safety plugs; protective caps.	CAT II 1000 V / 15 A
22.270-22.320	Insulated straight 4 mm safety plugs; 0.75-2.5 mm ² .	CAT II 1000 V / 15-32 A
22.380-22.470	Stackable safety plugs; 1.0-2.5 mm ² conductors.	CAT II 600-1000 V / 19-32 A
22.510-22.580	Stackable plug to right-angle/shrouded contact.	30 VAC-60 VDC / 15 A



BNC ADAPTERS & BREAKOUTS

Insulated BNC male breakout assemblies using flexible RG58/U cable, approximately 1.2 m, with safety plugs or test clips.

Model	Output Connection	Rating
21.010	BNC male to 2 x 4 mm straight safety plugs.	CAT I 600 V; CAT II 50 V / 3 A
21.020	BNC male to 2 x 4 mm stackable safety plugs.	CAT I 600 V; CAT II 50 V / 3 A
21.030	BNC male to 2 x 4 mm stackable plugs.	CAT I 600 V; CAT II 50 V / 3 A
21.040	BNC male to 2 mm test clips.	CAT I 600 V; CAT II 50 V / 3 A

TEST & MEASUREMENT ACCESSORIES



CROCODILE CLIPS

Standard and safety crocodile clips in brass or steel with PA, ABS or PVC insulation and nickel-plated contact surfaces.

Model Group	Construction	Rating
27.607	PA; brass; nickel plated.	30 VAC-60 VDC / 10 A
27.257	PA; brass; nickel plated.	30 VAC-60 VDC / 16 A
27.258	PA; brass; nickel plated.	CAT II 300 V / 16 A
27.259	ABS; steel; nickel plated.	30 VAC-60 VDC / 10 A
27.260 / 27.262 / 27.263	PA; brass; safety crocodile clip.	CAT II 1000 V / 32 A
27.704-27.723	PVC/ABS insulated steel or brass clip range.	Selected models up to 30 A



CABLE & TEST KITS

PVC and silicone test cable from 0.35 to 13.30 mm². Complete kits combine compatible safety leads, probes, clips and connection accessories.

Cable / Kit	Technical Information	Rating / Contents
PVC Cable	0.50 / 0.75 / 1.00 / 2.50 mm²; OD 2.3-3.9 mm.	1500 V / 10-32 A
Silicone Cable	0.35-13.30 mm²; OD 1.7-6.7 mm.	1500 V / 7-165 A
33.110 / 33.120	Safety leads + probes + safety crocodile clips + test clip/probe.	Complete kit
33.130 / 33.140	Safety leads + probes + safety crocodile clips + test clips.	Complete kit
33.150	Safety leads + 4 mm leads + probes + safety crocodile clips.	Complete kit
33.310 / 33.320	Expanded safety lead/probe/clip sets; selected versions with tool bag.	Complete kit